

Linear High Bay Stock Sheet

VersaBay® high bays can provide an energy savings of over 50%, cutting your cost and improving your bottom line—while enhancing the quality of lighting in the space. The **VersaBay®** fixture makes retrofitting an easy decision. Replacing 400W metal halide systems, the **VersaBay®** high bay can yield payback in one year while improving illumination and reducing maintenance. Your bottom line benefits from the use of fluorescent high bays through energy savings, tax deductions and rebates.



6 Lamp Linear High Bay

LHV4 654 M4R U 24EPU

6-lamp T5HO linear high bay, [miro 4 reflector](#), 20.63" wide and 2" deep
(1) 2-lamp & (1) 4-lamp T5HO programmed start ballasts
Recommended mounting heights of 20-35'

LHV4 632 GWU 3EHLU

6-lamp T8 linear high bay, [white reflector](#), 20.63" wide and 2" deep
(2) 3-lamp T8 instant, high light output ballasts
Recommended mounting heights of 12-25'

LHV4 632 M4R U 3EHLU


6-lamp T8 linear high bay, [miro 4 reflector](#), 20.63" wide and 2" deep
(2) 3-lamp T8 instant, high light output ballasts
Recommended mounting heights of 12-25'

4 Lamp Linear High Bay

LHV4 432 GWU 4EHLU

4-lamp T8 linear high bay, [white reflector](#), 16.19" wide and 2" deep
(1) 4-lamp T8 instant, high light output ballasts
Recommended mounting heights of 10-15'


Linear High Bay Accessories

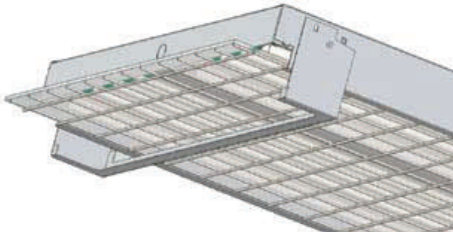

LHV6CP Flat clear lens, *(requires side panels and end jaws)*
for 6-lamp LHV series linear high bay fixture

LHV6FWG Flat wire guard, *(requires side panels and end jaws)*
for 6-lamp LHV series linear high bay fixture

LHV6SPJ Side panels and end jaws *(required for lens and/or wire guard)*
for 6-lamp LHV series linear high bay fixture

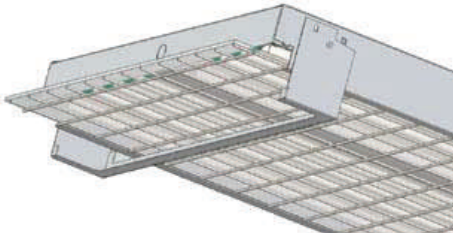

LHV4CP Flat clear lens, *(requires side panels and end jaws)*
for 4-lamp LHV series linear high bay fixture

LHV4FWG Flat wire guard, *(requires side panels and end jaws)*
for 4-lamp LHV series linear high bay fixture

LHV4SPJ Side panels and end jaws *(required for lens and/or wire guard)*
for 4-lamp LHV series linear high bay fixture



LHVOS1* Occupancy Sensor Assembly with one relay, 120-347 volts.
Mounts directly to end caps. Used in mounting heights up to 40'
* plug and play design



C6P15-120* Cord plug kit (white), 6 ft., straight blade NEMA 5-15P, 15 amp, 120volt
C6TL15-277* Cord plug kit (white), 6 ft., Twist Lock NEMA L7-15P, 15 amp, 277volt
* plug and play design



SLD15Y300L3* Speed Link Y-toggle adjustable support system, 9.9 ft.
*2 required per fixture.

Seven Locations in Nebraska

Columbus	Lexington	Lincoln	Norfolk
800-349-4678	800-652-1949	800-373-9068	800-672-3491
North Platte	Omaha Downtown	Omaha West	
800-915-6663	800-642-9310	402-334-8700	